

#### PRODUCT DATASHEET

# Recessed Down light HYD-314B-12W 4000K



## **Application**

- Hotel
- Mall
- Shop
- Theater
- Airport

#### **Benefits**

- Flicker free.
- Ra>80, restore the natural color
- Minimum Glare, more clear and comfortable
- Focus the light to highlight the highlights of the space

#### **Features**

- Warranty 5 years
- Buckle design, easy and quick installation
- Unti Uv PC, High light transmission, High light efficiency
- Die-cast aluminum body for better heat dissipation, anti-corrosion





#### **Electrical Data**

Nominal wattage (W)	12W
Nominal Voltage (V)	220-240 V
Mains Frequency (Hz)	50
Nominal Current (mA)	101
LED Driver Current (mA)	300
LED Driver Voltage (V)	30-42
LED Driver Efficiency (%)	83%
Power Factor $\lambda$	0.55
Total harmonic distortion (%)	
Operating mode	External LED driver

# **Photometrical data**

Luminous flux ±10% (lm)	1266 lm		
Luminous efficacy	104 lm/w		
Color temperature	4000K		
Light color (designation)	Natural White		
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity/cd	4619		
Flickering	Flicker free		
Beam angle	23 °		






4000K



**Dimensions & Weight** 

Diameter (mm)	87
Height (mm)	82.5
Product weight (g)	328

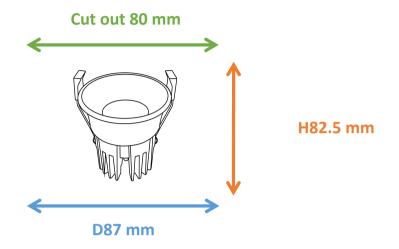

## **Material & Colors**

Product color	White		
Housing color	White		
Body material	Aluminum		
Cover material	PC		
Mercury content	0.0 mg		
<b>Application &amp; Mounting</b>			
Ambient temperature range	-20°C~+45 °C		
Temperature range at storage	-25°C~+60 °C		
Type of connection	Screwless terminal		
Type of protection	IP20		
Dimmable	No		
Mounting type	Recesse mounted		
Mounting location	Ceiling		
Application environment	Indoor		
Cut size (mm)	80		
LED module replaceable	Not replaceable		
With light source	Yes		

**Certificates & Lifespan** 


Life (h)	50,000	
Certificates	CB LVD EMC RoHS	
Standards	ISO9001:2015	



## **Logistical Data**

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W.	Volume CBM
HYD-314B-12W	57*25*52.5 cm	50		0.07481

# **Installation Method**

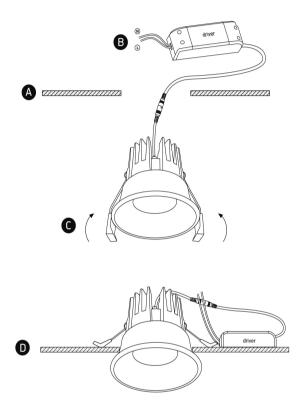

#### **Disclaimer**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.