

## PRODUCT DATASHEET

IP65+Aluminum+High luminous efficiency - Wall Light  
HYD-W09B-10W\*2 3000K



---

### Application

- Villa
- Courtyard
- Doorway
- Balcony
- Corridor

---

### Benefits

- Flicker free
- Lighting coverage area is wide
- Protection against water & dust, IP65
- Low power, high light efficiency, energy saving and environmental protection

---

### Features



- Warranty 5 years
- Glass, Good light transmission
- High light transmission mask to ensure uniform light, reduce the dark area of the lighting environment

## Electrical Data

Nominal wattage (W)	10W*2
Nominal Voltage (V)	220-240 V
Mains Frequency (Hz)	50
Nominal Current (mA)	108
LED Driver Current (mA)	500
LED Driver Voltage (VDC)	24-42
LED Driver Efficiency (%)	...
Power Factor $\lambda$	0.8C
Total harmonic distortion (%)	...
Operating mode	Built in LED driver

## Photometrical data


Luminous flux $\pm 10\%$ (lm)	1733 lm
Luminous efficacy	86 lm/w
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 5$ SDCM
Luminous intensity/cd	8514 cd
Flickering	Flicker free
Beam angle	310 °

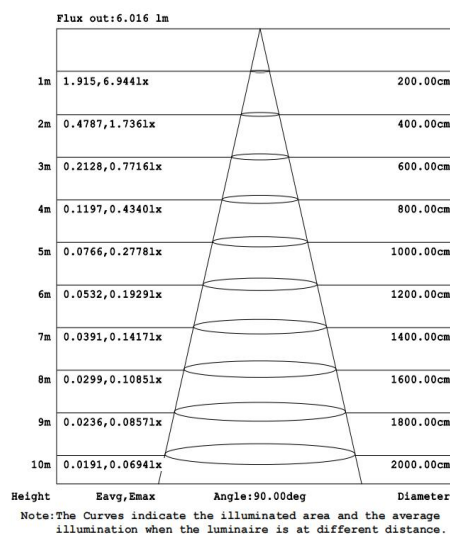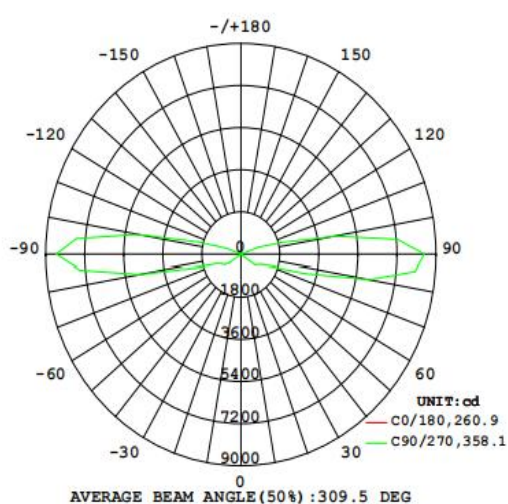

IES

## Dimensions & Weight

Diameter (mm)	90
Height (mm)	250
Product weight (g)	1008

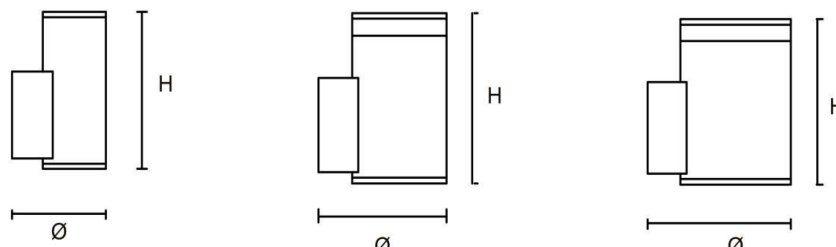

## Material & Colors

Product color	Clear glass / Black Housing
Housing color	Black
Body material	Aluminum
Cover material	Glass
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-30°C~+50 °C
Temperature range at storage	-40°C~+50 °C
Type of connection	Screw terminal
Type of protection	IP65
Dimmable	No
Mounting type	Surface mounted
Mounting location	Wall
Application environment	Indoor / Outdoor
Cut size (mm)	No
LED module replaceable	Not replaceable
With light source	Yes

## Certificates & Lifespan

---

Life (h)	50,000
Certificates	CB CE LVD EMC
Standards	ISO9001:2015

## Logistical Data


---

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W. kg	Volume CBM
HYD-W09B-10W*2	...	...	...	...

This is the estimated data. Subject to the actual shipment.

## Installation Method

---



## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release