

PRODUCT DATASHEET

STRIP LIGHT | HYD-ST02-5W COB 24V IP20

A variety of installation methods are available.



Areas of application

- Laminate
- Ceiling
- Stage
- The Bar
- Dining room
- Supermarket
- Hotel

Product benefits

- The lamp belt is not easy to break and has a long life
- Auxiliary lighting to enhance the brightness of the space
- Flexibly adjust the shape, achieve a variety of shape design, improve the beauty of the space

Product features

- Type:IP20/COB
- High quality lamp beads, uniform light
- Strong flexibility, to achieve any radian modeling
- Strong safety, long life, the most important is flicker free, more healthy lighting

TECHNICAL DATA

Electrical data

Nominal wattage	5W
Nominal voltage	DC24 V
Mains frequency	50/60 Hz
Protection class	Class II
Operating mode	External the LED driver

Photometrical data


Luminous flux(lm)	425	475	525
Luminous efficacy(lm/w)	85	95	105
Color temperature	3000K	4000K	6000K
Light color (designation)/White	Warm	Nature	Cold
Color rendering index Ra	>80		
UGR	<19		
Standard deviation of color matching	<5		
Low flicker	No		
Beam angle	-		

Dimensions & Weight D

Size	10M/Roll
Product weight	-

Materials & Colors

Product color	White
Body material	Copper+PET film
Cover material	Copper+PET film
Mercury content	0.0 mg

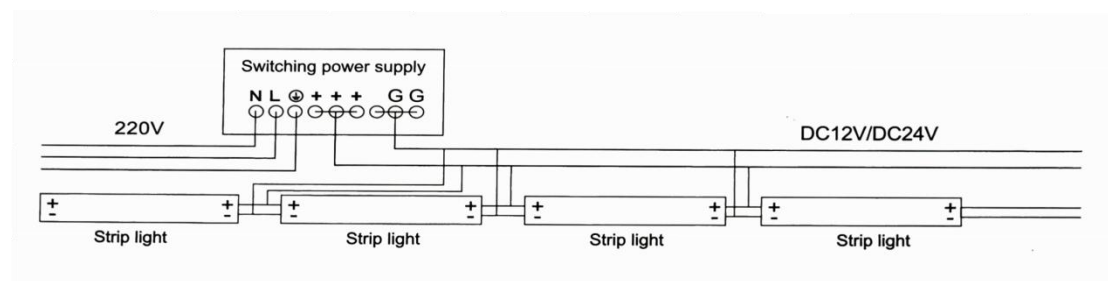

Application & Mounting

Ambient temperature range	-10 - +40°C
Temperature range at storage	-10 - +40°C
Type of connection	Screw terminal
Type of protection	IP 20
Dimmable	No
Mounting type	Embedded, Card and Paste
Mounting location	Wall,Laminate,Ceiling
Application environment	Indoor
Mounting diameter	10M/Roll
LED module replaceable	No replaceable
With light source	Yes

Lifespan

Life time	> 30,000 h
Warranty	3 years

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.