
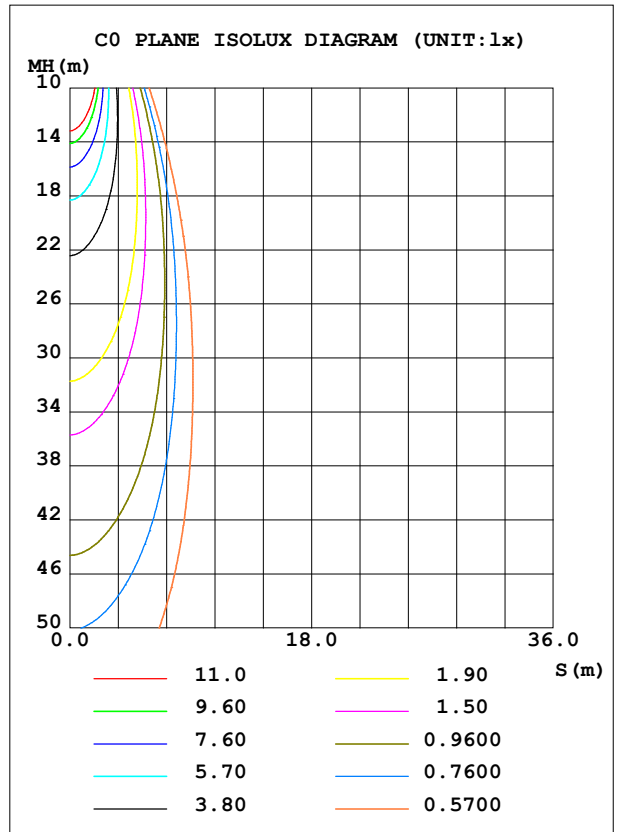


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	342CR	Imax (cd)	1897	S/MH (C0/180)	0.45
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.40
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	524.12	η UP, DN (C0-180)	0.0, 53.5
NOMINAL FLUX (lm)	524.121	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 46.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	0.30

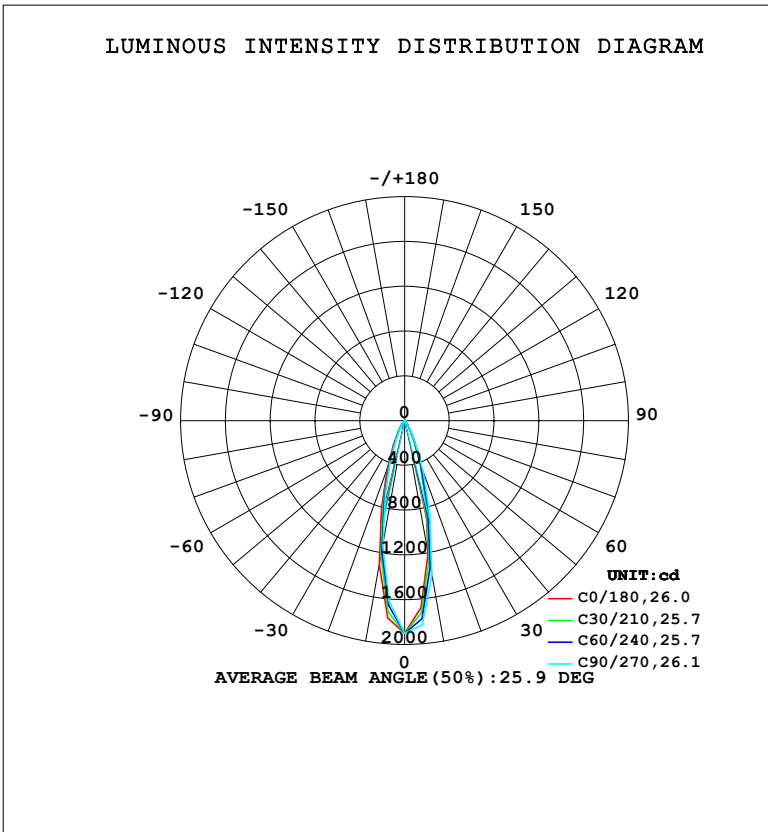

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1211	1294	1403	1461	1306	1198	1134	1113	0- 10	150.4	150.4	28.7,28.7
20	403.0	418.7	485.0	522.1	454.8	385.0	378.7	357.8	10- 20	219.1	369.5	70.5,70.5
30	96.19	98.29	115.5	131.3	117.5	100.5	94.89	89.37	20- 30	108.4	477.8	91.2,91.2
40	23.82	22.88	27.52	30.41	31.24	25.74	24.53	20.79	30- 40	36.25	514.1	98.1,98.1
50	2.462	2.264	1.754	3.729	3.945	3.318	2.733	1.987	40- 50	8.955	523.0	99.8,99.8
60	0.1674	0.1020	0.1748	0.1150	0.1015	0.1682	0.1265	0.1817	50- 60	0.8339	523.9	100,100
70	0.1375	0.0720	0.1266	0.0726	0.0717	0.1441	0.1024	0.1635	60- 70	0.1231	524.0	100,100
80	0.1016	0.0060	0.0664	0.0181	0.0358	0.1081	0.0661	0.1272	70- 80	0.0961	524.1	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0198	524.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 520.59 lm

%lum = 99.3%

%lamp = 99.3%

Conical surface Flux(130deg): 523.95 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.121x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

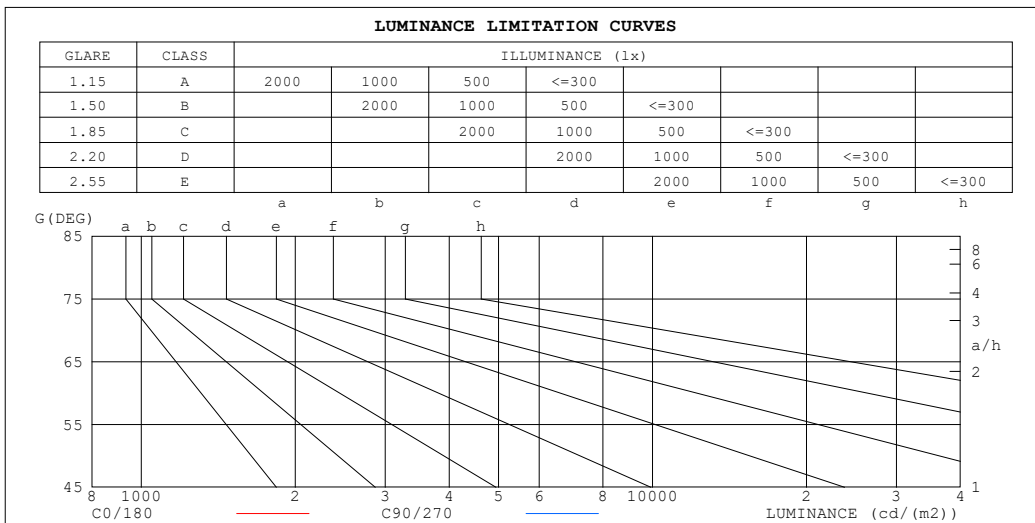

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	3	0
80	6	4
75	5	4
70	4	4
65	4	4
60	3	3
55	8	4
50	39	27
45	118	116


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.98	.98	.96
2.0	1.07	1.04	1.01	1.05	1.02	.99	1.02	.99	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.96	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.89	.85	.82	.89	.84	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.77	.82	.79	.77	.76
8.0	.83	.78	.75	.82	.78	.75	.81	.78	.75	.80	.77	.75	.80	.77	.74	.73
9.0	.80	.76	.73	.80	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.72	.71
10.0	.77	.73	.70	.77	.73	.70	.76	.72	.70	.76	.72	.70	.75	.72	.69	.68

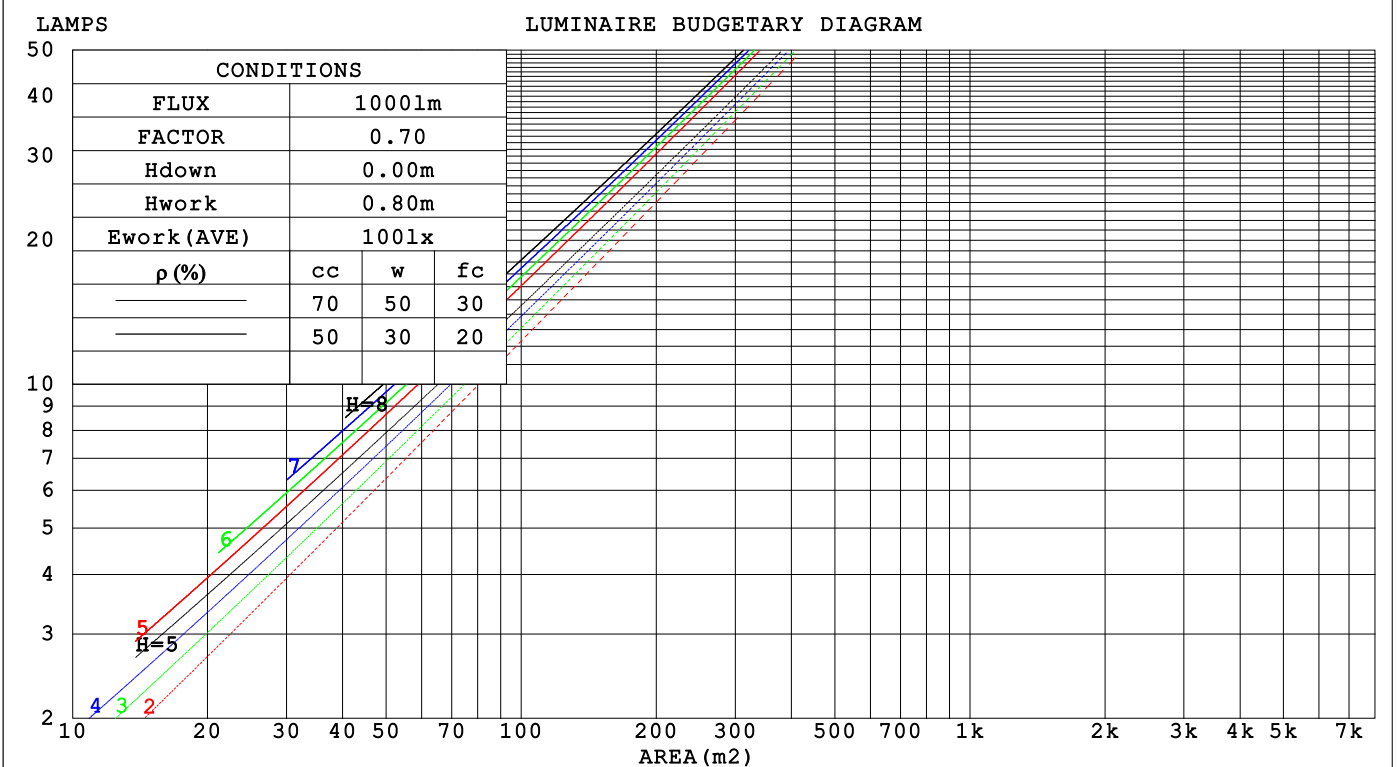

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz		
Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.145	.082	.026	.138	.079	.025	.126	.072	.023	.114	.066	.021	.104	.060	.019	
2.0	.135	.074	.023	.130	.072	.022	.120	.067	.021	.110	.062	.019	.101	.057	.018	
3.0	.127	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.099	.055	.017	
4.0	.120	.062	.018	.116	.061	.018	.109	.058	.017	.102	.055	.017	.096	.052	.016	
5.0	.113	.058	.017	.110	.057	.016	.104	.054	.016	.098	.052	.015	.093	.049	.015	
6.0	.108	.054	.015	.105	.053	.015	.099	.051	.015	.094	.049	.014	.090	.047	.014	
7.0	.103	.051	.014	.100	.050	.014	.095	.048	.014	.091	.047	.014	.087	.045	.013	
8.0	.098	.048	.013	.096	.047	.013	.092	.046	.013	.088	.044	.013	.084	.043	.013	
9.0	.094	.045	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012	.082	.041	.012	
10.0	.090	.043	.012	.088	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.117	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.078	.107	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.065	.099	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.106	.076	.054	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.093	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.087	.056	.035	.075	.049	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004	
10.0	.083	.051	.030	.071	.045	.027	.049	.031	.019	.029	.019	.011	.009	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz										
Lamp Flux:524.12lx1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-1.8	-1.1	-1.6	-0.9	-0.8	-0.5	0.2	-0.3	0.3	0.5
3H	-1.9	-1.3	-1.7	-1.1	-0.9	-0.7	-0.0	-0.5	0.2	0.3
4H	-2.0	-1.4	-1.8	-1.2	-1.0	-0.8	-0.1	-0.5	0.1	0.3
6H	-2.1	-1.5	-1.8	-1.3	-1.0	-0.9	-0.3	-0.6	-0.0	0.2
8H	-2.1	-1.6	-1.8	-1.3	-1.1	-0.9	-0.3	-0.6	-0.1	0.2
12H	-2.2	-1.6	-1.9	-1.4	-1.1	-0.9	-0.4	-0.6	-0.1	0.1
4H 2H	-2.0	-1.4	-1.8	-1.2	-1.0	-0.8	-0.1	-0.5	0.1	0.3
3H	-2.2	-1.6	-1.9	-1.4	-1.1	-0.9	-0.4	-0.6	-0.1	0.1
4H	-2.3	-1.8	-1.9	-1.5	-1.2	-1.0	-0.5	-0.7	-0.2	0.1
6H	-2.4	-1.9	-2.0	-1.6	-1.3	-1.1	-0.7	-0.8	-0.4	-0.0
8H	-2.4	-2.0	-2.0	-1.7	-1.3	-1.2	-0.8	-0.8	-0.4	-0.1
12H	-2.5	-2.1	-2.1	-1.7	-1.4	-1.3	-0.9	-0.8	-0.5	-0.1
8H 4H	-2.4	-2.0	-2.0	-1.7	-1.3	-1.2	-0.8	-0.8	-0.4	-0.1
6H	-2.5	-2.2	-2.1	-1.8	-1.4	-1.3	-1.0	-0.9	-0.6	-0.2
8H	-2.6	-2.3	-2.2	-1.9	-1.4	-1.4	-1.1	-0.9	-0.6	-0.2
12H	-2.7	-2.4	-2.2	-2.0	-1.5	-1.4	-1.2	-1.0	-0.7	-0.3
12H 4H	-2.5	-2.1	-2.1	-1.7	-1.4	-1.3	-0.9	-0.8	-0.5	-0.1
6H	-2.6	-2.3	-2.2	-1.9	-1.4	-1.4	-1.1	-0.9	-0.6	-0.2
8H	-2.7	-2.4	-2.2	-2.0	-1.5	-1.4	-1.2	-1.0	-0.7	-0.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.8 / -18.7					+ 3.6 / -21.0				
1.5H	+ 6.3 / -19.2					+ 6.2 / -20.9				
2.0H	+ 9.6 / -11.9					+ 9.9 / -12.5				

CIE Pub.117, 524.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.2)  
 Area: 0.1 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 15.0DEG	γ Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.401m [K=1.0000]
Test Date:2024-01-22	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	113	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

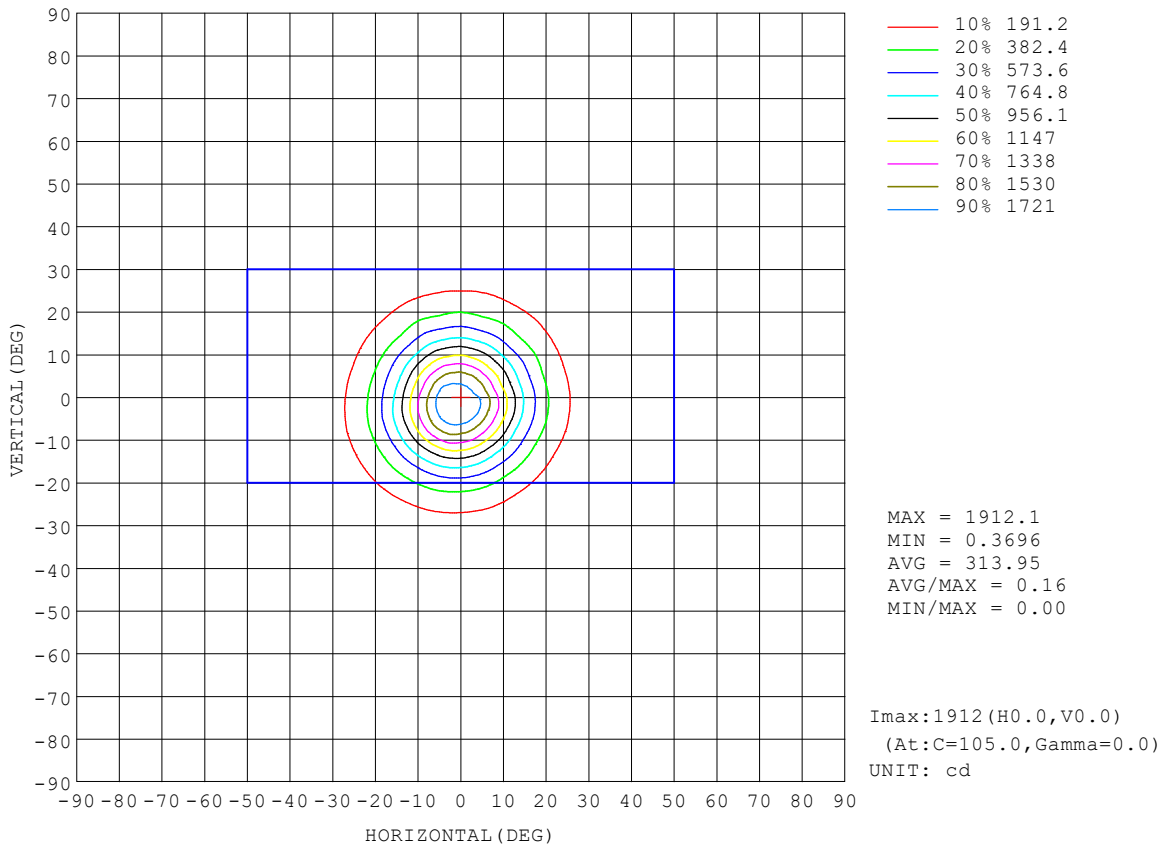


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

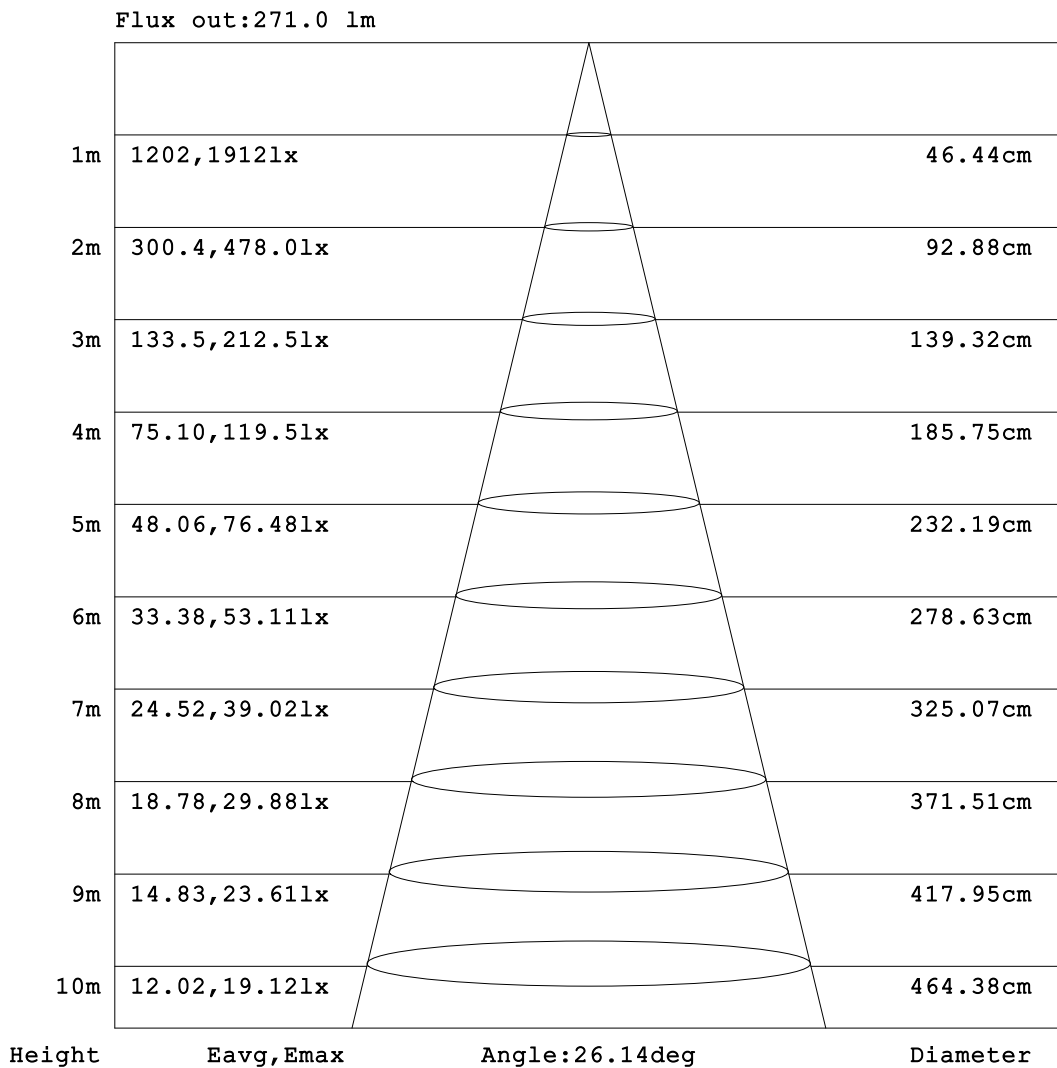


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2024-01-22

γ Range: 0 - 90DEG  
γ Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.12lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

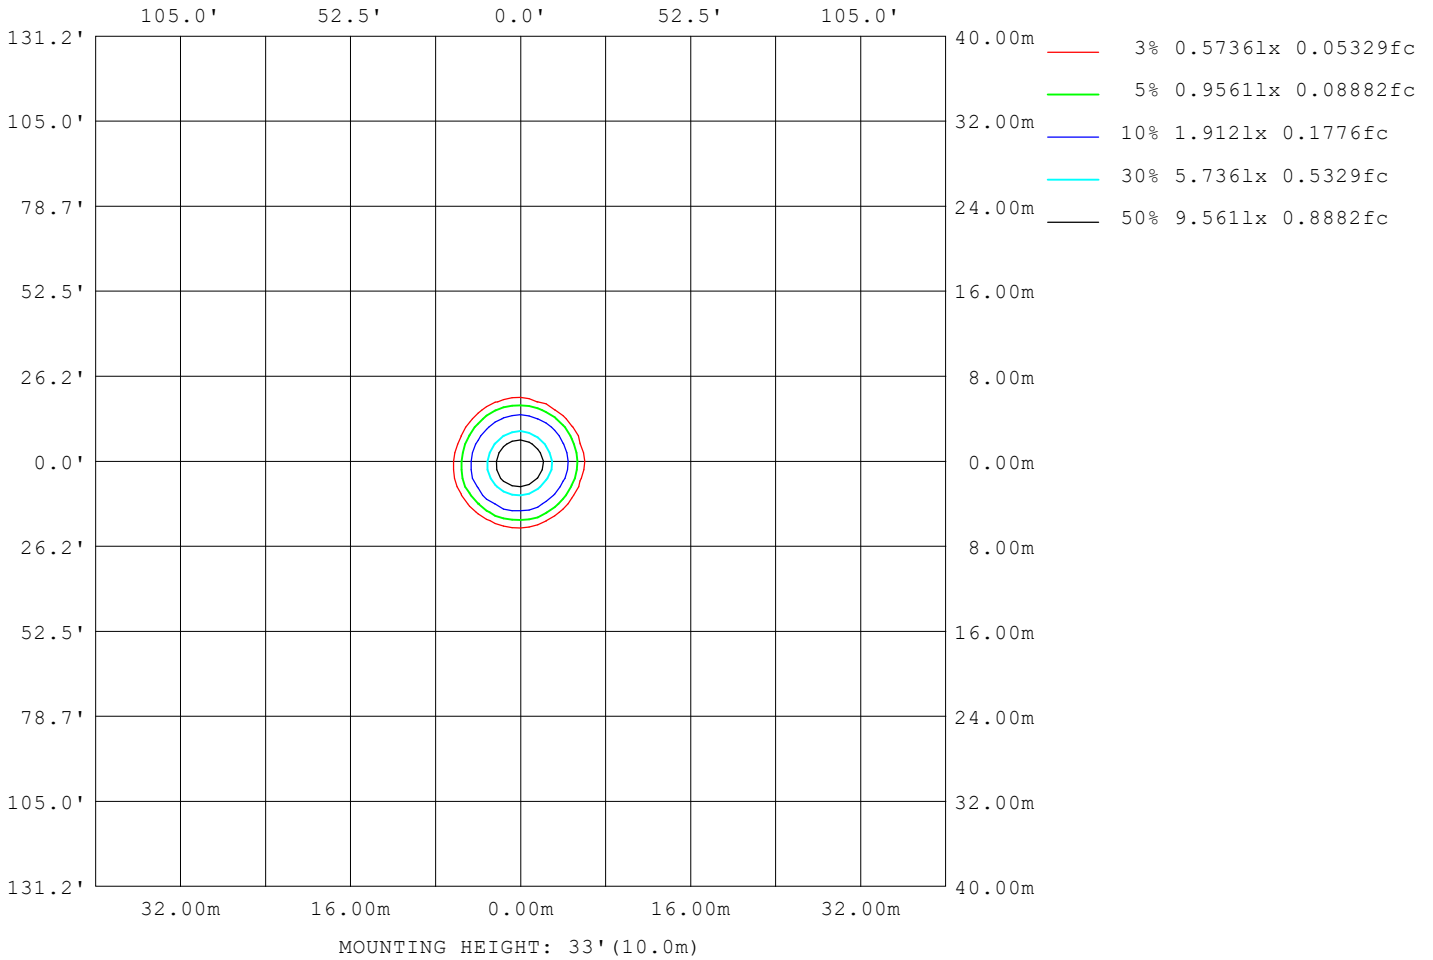

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2024-01-22

γ Range: 0 - 90DEG  
γ Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**LED Avg.L Report**

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.121x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3
L_0~180 (75) av	3
L_0~180 (85) av	1
L_90~270 (65) av	3
L_90~270 (75) av	4
L_90~270 (85) av	0
L_45 (65) av	3
L_45 (75) av	4
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

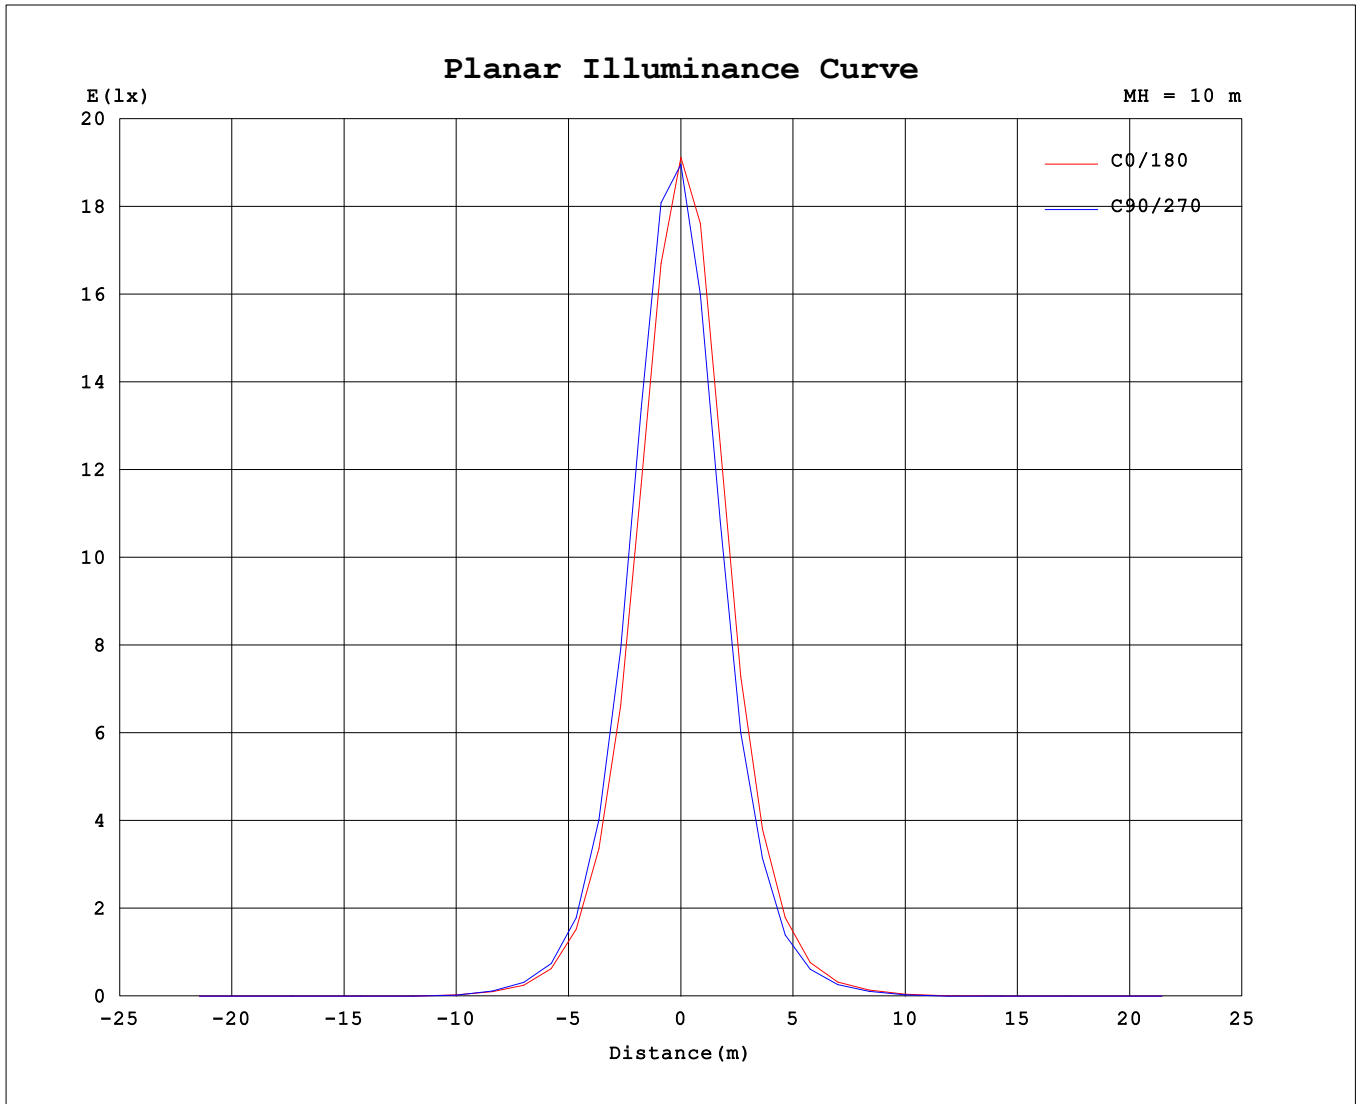

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.41V I:0.0601A P:7.2462W PF:0.5474 Freq:50.00Hz Lamp Flux:524.121x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897	1897
5	1676	1707	1726	1761	1777	1811	1830	1867	1878	1883	1847	1823	1768	1731	1713	1678	1657	1627	1618
10	1211	1257	1265	1294	1320	1371	1403	1454	1457	1461	1427	1389	1306	1249	1229	1198	1181	1140	1134
15	730	752	749	780	799	846	879	911	913	923	898	877	803	758	739	711	706	673	667
20	403	410	403	419	431	463	485	508	513	522	510	501	455	421	406	385	400	367	379
25	204	206	200	206	212	233	241	256	260	271	266	265	239	217	209	198	200	192	188
30	96.2	95.4	93.5	98.3	103	113	115	122	125	131	133	132	117	107	104	101	103	100	94.9
35	45.9	45.2	44.7	48.4	50.5	56.7	57.9	59.3	59.2	62.6	63.8	66.5	59.1	54.4	52.7	51.7	51.7	50.3	48.8
40	23.8	21.8	21.5	22.9	24.7	27.7	27.5	28.2	29.3	30.4	31.4	33.9	31.2	28.3	26.6	25.7	25.2	24.6	24.5
45	8.28	7.97	7.77	8.00	8.27	8.79	8.24	8.94	10.02	12.1	13.2	15.0	13.4	12.0	11.3	10.1	9.34	8.96	8.66
50	2.46	2.47	2.26	2.26	2.22	2.19	1.75	2.17	2.79	3.73	4.17	4.53	3.95	3.39	3.43	3.32	3.12	2.81	2.73
55	0.44	0.38	0.37	0.32	0.27	0.14	0.22	0.16	0.40	0.50	0.70	0.80	0.63	0.64	0.54	0.55	0.43	0.36	0.35
60	0.17	0.10	0.16	0.10	0.17	0.10	0.17	0.11	0.17	0.12	0.17	0.11	0.10	0.16	0.10	0.17	0.11	0.18	0.13
65	0.15	0.08	0.14	0.08	0.13	0.09	0.16	0.09	0.15	0.09	0.15	0.08	0.08	0.14	0.09	0.16	0.10	0.17	0.11
70	0.14	0.07	0.13	0.07	0.13	0.06	0.13	0.07	0.13	0.07	0.14	0.07	0.07	0.13	0.08	0.14	0.09	0.16	0.10
75	0.12	0.05	0.10	0.04	0.11	0.04	0.11	0.05	0.11	0.05	0.11	0.05	0.05	0.12	0.07	0.13	0.08	0.14	0.09
80	0.10	0.02	0.08	0.01	0.07	0.01	0.07	0.02	0.08	0.02	0.08	0.03	0.04	0.09	0.04	0.11	0.05	0.13	0.07
85	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-01-22

γ Range: 0 - 90DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

